


standaard precisie*

*precisie: spantangen kleiner dan < 0,015, groter dan 10 mm < 0,020

eenheidsnummer	type	van mm \varnothing	tot mm \varnothing	oplopend met		D	L
425E (4008E)	ER11	0,5	7		0,5	11,5	18
426E	ER16	1,0	10,0	0,5-1 1,0-10,0	0,5 1,0	17,0	27,5
428E	ER20	1,0	13,0	1,0-3,0 3,0-13,0	0,5 1,0	21,0	31,5
430E	ER25	1,0	16,0	1,0-3,0 3,0-16,0	0,5 1,0	26,0	34,0
470E	ER32	3,0	20,0		1,0	33,0	40,0
472E	ER40	3,0	26,0		1,0	41,0	46,0
474E	ER50	8,0	34,0		1,0	52,0	60,0

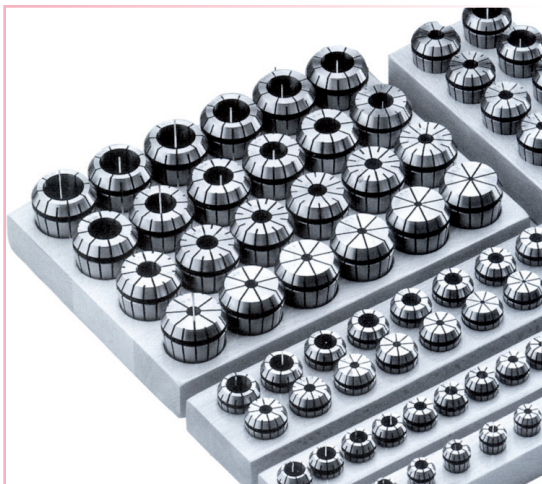

Sets spantangen met beuken blok

Standaard precisie < 15 μ

Extra precisie < 5 μ

ER 16 = 10 spantangen 1- 10 mm

ER 20 = 12 spantangen 2- 13 mm

ER 25 = 15 spantangen 2- 16 mm

ER 32 = 18 spantangen 3- 20 mm

ER 40 = 23 spantangen 4- 26 mm