


Proger drukspantang volgens DIN 6334

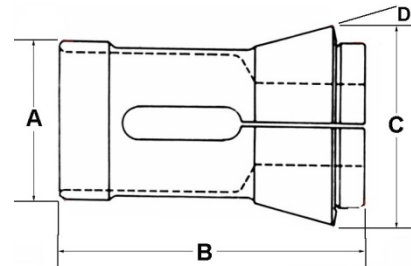

type	A	B	C	D	bereik rond	bereik zeskant	bereik vierkant
125 E	17,5	51	22	15°	12	10	8
140 E	22	55	30	15°	16	13	11
148 E	28	70	38	15°	22	19	15
161 E	32	75	45	15°	26	22	18
163 E	35	80	48	15°	30	26	21
171 E	42	94	55	15°	36	30	25
173 E	48	94	60	15°	42	36	29
176 E	56	94	68	15°	50	42	35
185 E	66	110	84	15°	60	52	42

Voor actuele voorraad en prijzen belt u 0252-524544.